




COLONNA PT

ELEMENTI NORMALIZZATI


COLONNA DI GUIDA A DUE DIAMETRI - PT

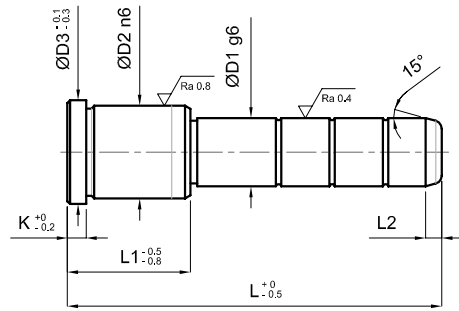

ACCIAIO: DA CEMENTAZIONE
DUREZZA: 60-62 HRC

D1	D2	D3	K	L2	L1	L																				
						50	60	70	80	90	100	120	140	160	180	200	220	240	260	280	300	340				
12	18	22	5	5	22	-	-	-	-	-	-															
					26	-	-	-	-	-	-															
					36	-	-	-	-	-	-															
					46			-	-	-	-	-														
14	20	24	5	5	22	-	-	-	-	-	-															
					26		-	-	-	-	-	-														
					36			-	-	-	-	-														
					46				-	-	-	-	-													
					56						-	-	-													
16	22	26	5	5	22	-	-	-	-	-	-	-														
					26	-	-	-	-	-	-	-	-													
					36		-	-	-	-	-	-	-													
					46			-	-	-	-	-	-	-												
					56					-	-	-	-	-	-											
					66							-	-	-	-	-										
					76									-	-	-	-									
					96											-	-	-	-							
18	26	30	5	5,5	26		-	-	-	-	-															
					36		-	-	-	-	-	-														
					46		-	-	-	-	-	-	-													
					56					-	-	-	-	-	-											
					66								-	-	-	-	-									
					76										-	-	-	-								
20	28	32	6	6	26		-	-	-	-	-	-														
					36		-	-	-	-	-	-	-													
					46			-	-	-	-	-	-	-												
					56					-	-	-	-	-	-											
	30*	34		6	6	66						-	-	-	-	-										
						76								-	-	-	-									
						86										-	-	-	-							
						96											-	-	-	-						

COLONNA DI GUIDA A DUE DIAMETRI - PT

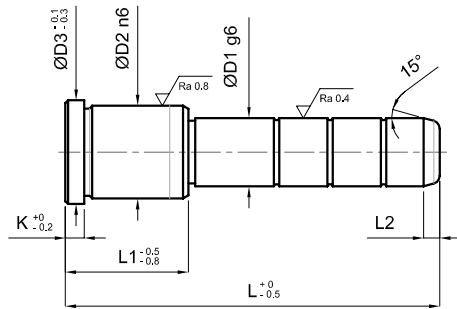

ACCIAIO: DA CEMENTAZIONE
DUREZZA: 60-62 HRC

D1	D2	D3	K	L2	L1	L																			
						50	60	70	80	90	100	120	140	160	180	200	220	240	260	280	300	340	400		
25	34	38	7	7	26				-	-	-														
					36*	40				-	-	-	-	-	-	-									
									-	-	-	-	-	-											
												-	-	-	-	-	-	-							
															-	-	-	-	-						
																-	-	-	-	-					
																	-	-	-	-	-				
32	40	45	7	7,5	36				-	-	-	-	-												
					46						-	-	-	-											
40	48	52	8	8	46							-	-	-	-	-									
					56																				
50	60	65	10	9	96																				
					126																				



www.eleenorm.com