




# RACCORDI E TUBI ARIA

ELEMENTI NORMALIZZATI

## RACCORDO DIRETTO



**MATERIALE:** Ottone, Nichelato  
**GUARNIZIONE:** EPDM




PART N°	PART N°	TUBE ØD	THREAD
MSM081/8R	MSM081/8B	8	1/8"
MSM081/4R	MSM081/4B	8	1/4"
MSM083/8R	MSM083/8B	8	3/8"
MSM101/4R	MSM101/4B	10	1/4"
MSM103/8R	MSM103/8B	10	3/8"
MSM123/8R	MSM123/8B	12	3/8"
MSM121/2R	MSM121/2B	12	1/2"

## RACCORDO DIRETTO MASCHIO A 90°




**MATERIALE:** Ottone, Nichelato  
**GUARNIZIONE:** EPDM




PART N°	PART N°	TUBE ØD	THREAD
MSW081/8R	MSW081/8B	8	1/8"
MSW081/4R	MSW081/4B	8	1/4"
MSW083/8R	MSW083/8B	8	3/8"
MSW101/4R	MSW101/4B	10	1/4"
MSW103/8R	MSW103/8B	10	3/8"
MSW123/8R	MSW123/8B	12	3/8"
MSW121/2R	MSW121/2B	12	1/2"

## RACCORDO DIRETTO FEMMINA



**MATERIALE:** Ottone, Nichelato  
**GUARNIZIONE:** EPDM





PART N°	PART N°	TUBE ØD	THREAD
MSF081/8R	MSF081/8B	8	1/8"
MSF081/4R	MSF081/4B	8	1/4"
MSF083/8R	MSF083/8B	8	3/8"
MSF101/4R	MSF101/4B	10	1/4"
MSF103/8R	MSF103/8B	10	3/8"
MSF123/8R	MSF123/8B	12	3/8"
MSF121/2R	MSF121/2B	12	1/2"

**TUBO IN POLIURETANO A BASE DI ETERE PER RACCORDI RAPIDI - TEMPERATURA MASSIMA 70°C / PICCO 100°C.**



PART N°	DESCRIPTION	D (MM)	D1 (MM)	WORKING PRESSURE*		BEND RADIUS (MM)*	COIL LENGTH L	COLOUR
				PSI	BAR			
PPU8B	Pneumatic Polyurethane Tubing 8mm x 5.5mm	8	5.5	116	8	31	30m	●
PPU8R	Pneumatic Polyurethane Tubing 8mm x 5.5mm	8	5.5	116	8	31	30m	●
PPU10B	Pneumatic Polyurethane Tubing 10mm x 7mm	10	7	116	8	40	30m	●
PPU10R	Pneumatic Polyurethane Tubing 10mm x 7mm	10	7	116	8	40	30m	●
PPU12B	Pneumatic Polyurethane Tubing 12mm x 8mm	12	8	116	8	43	30m	●
PPU12R	Pneumatic Polyurethane Tubing 12mm x 8mm	12	8	116	8	43	30m	●

\* Working pressure of 8 bar / 116 PSI is based on temperature of 20 °C, higher temperature will result in lower pressure resistance. See below graph for details

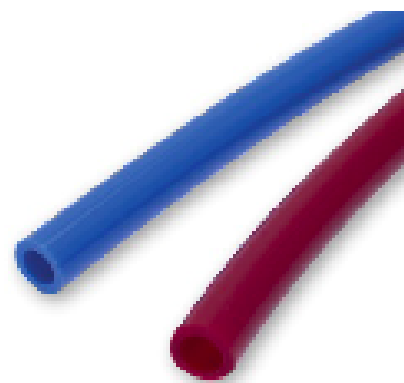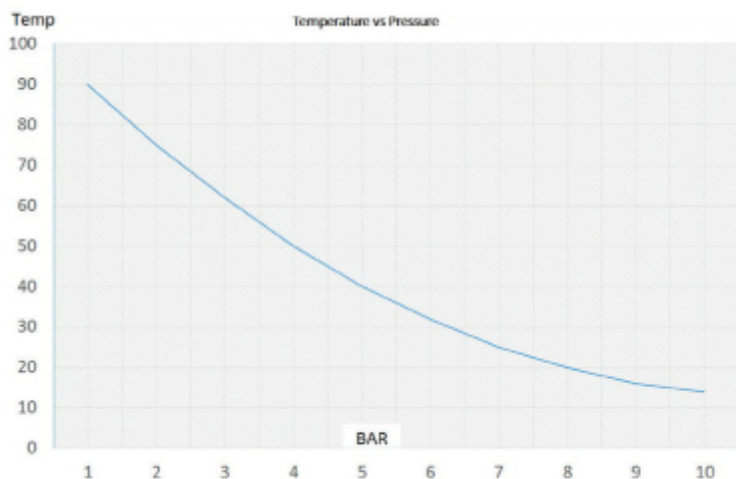



[www.eleenorm.com](http://www.eleenorm.com)