


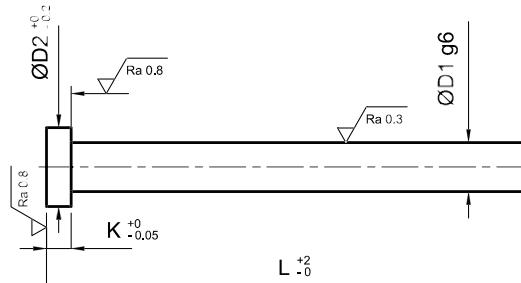

ESPULSORI TCN - TCT

ELEMENTI NORMALIZZATI

ESPULSORE A TESTA CILINDRICA NITRURATO IN POLLICI


ACCIAIO: PER PRESSOFUSIONE ED INIEZIONE
DUREZZA: SUPERFICIALE > 950 VICKERS - HV 0,3 / TESTA HRC 45 ± 5
RESISTENZA ALLA TRAZIONE: 1300/1450 N/MM²

D1	D2	K	L						
			4"	6"	8"	10"	14"	18"	25"
1/8	1/4	1/8	-	-	-	-	-	-	-
5/32	9/32	5/32	-	-	-	-	-	-	-
3/16	3/8	3/16	-	-	-	-	-	-	-
7/32	13/32	3/16	-	-	-	-	-	-	-
1/4	7/16	3/16	-	-	-	-	-	-	-
5/16	1/2	1/4	-	-	-	-	-	-	-
3/8	5/8	1/4	-	-	-	-	-	-	-
7/16	11/16	1/4	-	-	-	-	-	-	-
1/2	3/4	1/4	-	-	-	-	-	-	-
5/8	7/8	1/4	-	-	-	-	-	-	-
3/4	1"	1/4	-	-	-	-	-	-	-
1"	1" 1/4	1/4	-	-	-	-	-	-	-



www.elenorm.com